

Antenna/Tower Reliability




Tim Jellison W3YQ/KL7WV






- Use quality materials (don't be a cheap ham!)
- Do it right the first time
- Perform regular inspections
- Be safe when working on antennas and towers
- Is it K3LR approved?



Use only good quality materials



- Name-brand connectors only



Use only good quality materials



- Only use good quality tape. NO ZIP-TIES




Use only good quality materials



- Consider pre-made cables





When soldering PL259's, don't be afraid to use a big iron and get the connector hot – the solder must flow. Just keep everything straight in-line and be sure to let it cool down completely before you move it. That way the center dielectric will harden back up. I let mine sit about 10 minutes after soldering before doing anything with it.






Moisture is coax's worst enemy. All outdoor connections must be properly sealed. Here's a proven method to keep connections dry.

Weatherproofing connections



- First, tighten with pliers. Finger-tight is not good enough.

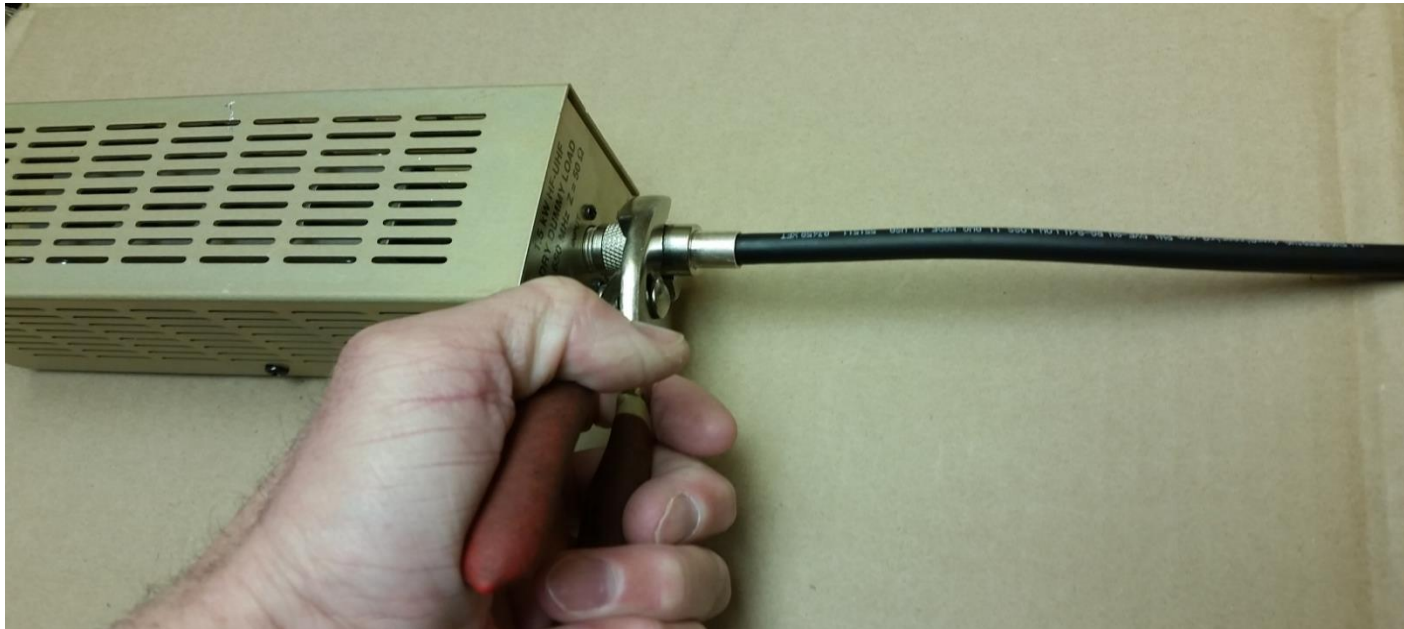


Weatherproofing connections



- One wrap of 88 tape. And always cut the end when taping. Never pull/tear the end or you'll end up with a tail.



Weatherproofing connections



- Add a layer of mastic.



Weatherproofing connections



Weatherproofing connections



- Two wraps of 88 tape. Overlap each layer by $\frac{1}{2}$ the width of the tape.






- There are two tips in the next photo.
- First, tape your cables with 88 tape – no tiewraps. Tiewraps can smash the coax and they will eventually fail due to weathering.
- Second, always put a barrel at the top of your tower if the feedpoint is out of reach. Makes antenna removal much easier.



Use a piece of split loom if there's a concern about cables rubbing.





Waterproofing a bearing

- Does your antenna sometimes not turn in the cold weather? It might be ice in your thrust bearing. Make a boot out of one of these.



Waterproofing a bearing



It can also keep the water out of an Orion 2800's top bearing.





The bolts in a TB3 can seize up. Apply anti-seize before installation and swap out the bolts with stainless (and still use anti-seize?)







Notice all the blue stuff? You should also use a lubricant on all stainless hardware. Blue Loctite is a good choice. It lubricates, locks, yet can still be removed later.





Also, when installing a Rohn tower, use anti-seize on the leg joints. It's conductive and makes the inevitable disassembly much easier.






Does your rotor or antenna slip on the mast?
You can add a secondary clamp which will
help out your U-bolts. It's better than
drilling/pinning the mast.

Here we give a Yaesu rotor some help



**Here is a secondary clamp below
the mast clamp of a 40M Yagi**

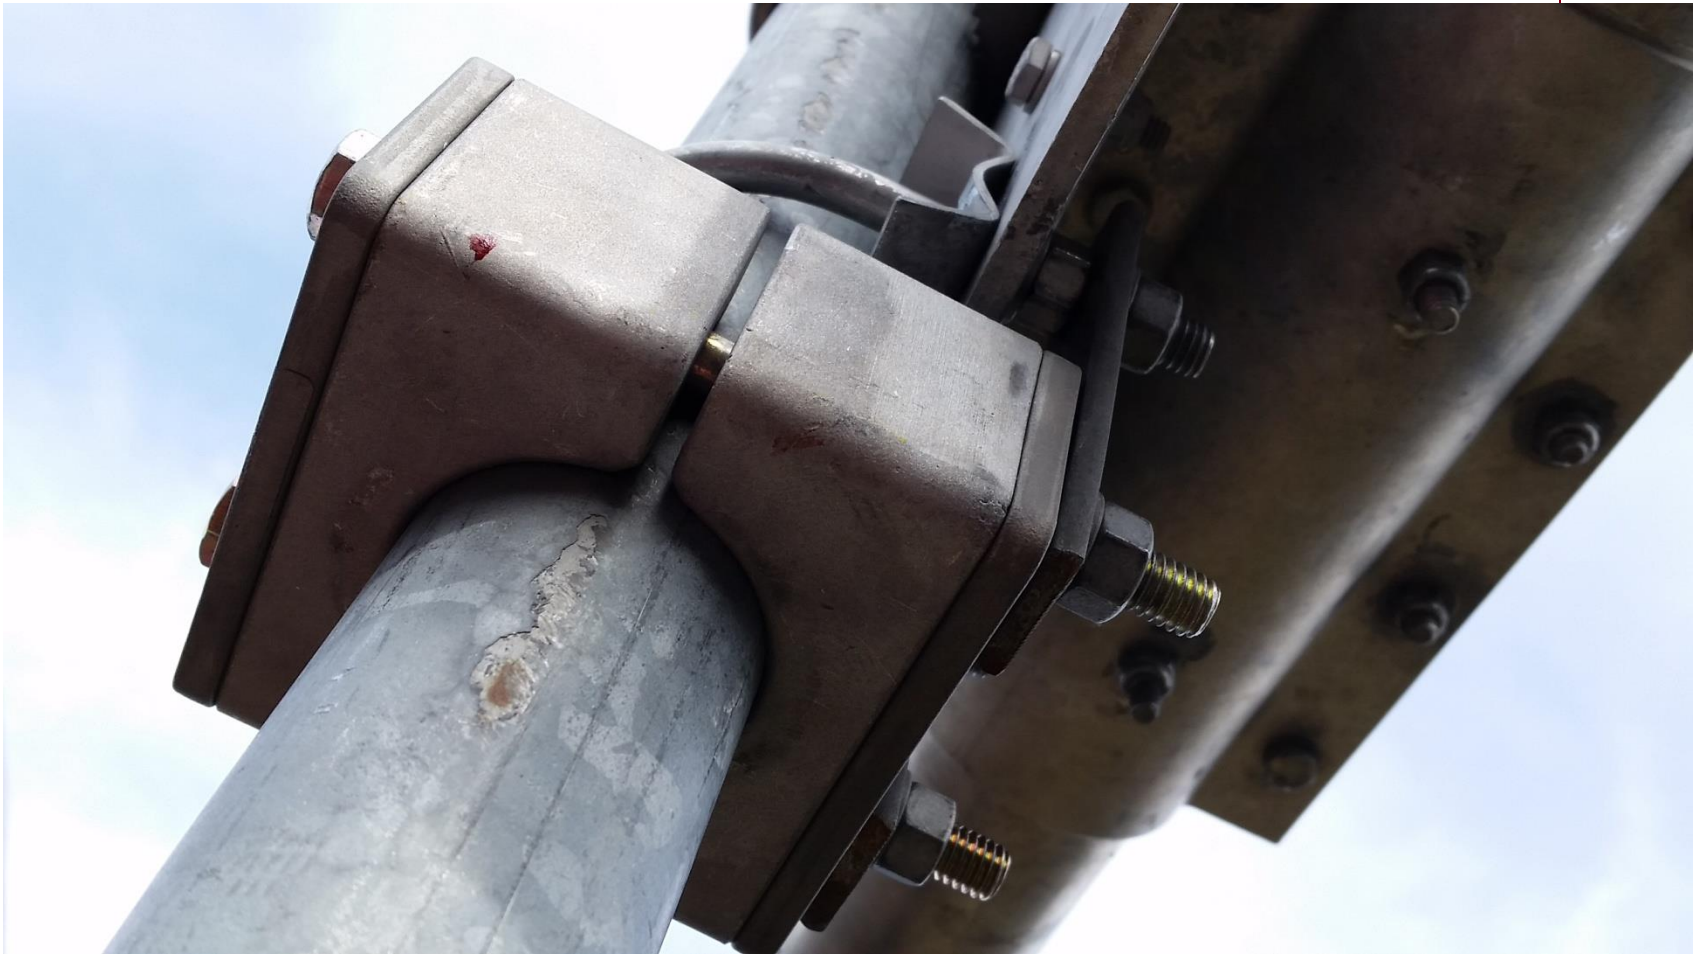





If the top section of your tower is above the top set of guys, the leg bolts **MUST** be tight and should be regularly checked. This is a point of great lateral stress and if the bolts loosen, the holes in the legs will elongate.






Do not over tighten anything on a Rohn tower leg. You could smash the leg (it can even split) and the tower will be compromised.





Solder all your crimps, otherwise the wire could pull out. If you're using insulated lugs, don't worry about melting the plastic.

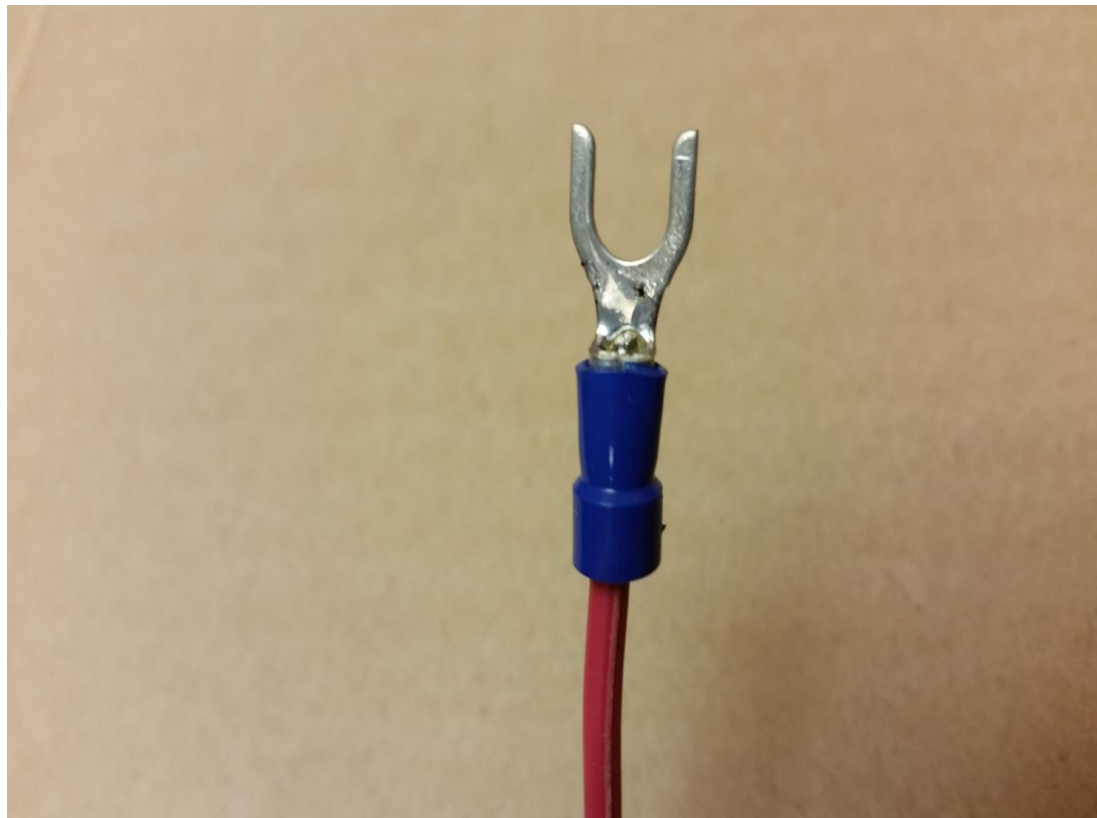

Conductive paste

- Usable on all metal to metal joints, especially aluminum antenna joints.





An even coat of SS30 will prevent oxidation and allow you to disassemble the joint later. Don't use NOALOX. It hardens with age





Here's a good way to level elements on a boom. Drill holes in a couple saw horses to accept saddle clamps. This will keep the boom from spinning. Install the first boom-to-element clamp and level it. Install the other clamps and level them. Once done and tight, install the end pieces of the elements. Everything will be level when done.





**And above all, when climbing
follow all safety rules!**



NO SK's

